

3.0WVDC ~ 16WVDC

(μ F)

Diameter d \varnothing \pm 1m/m	Temperature Characteristic			
	Y5R	Y5T	Y5U	Y5V
5	0.001 - 0.002	0.01 - 0.033	0.01 - 0.033	0.01 - 0.047
6	0.027 - 0.047	0.047	0.047	0.068 - 0.1
8	0.056 - 0.1	0.068 - 0.1	0.068 - 0.1	
10				0.22


25WVDC

Diameter d \varnothing \pm 1m/m	Temperature Characteristic			
	Y5R	Y5T	Y5U	Y5V
5	0.001 - 0.01	0.01 - 0.022	0.01 - 0.033	0.01 - 0.022
6	0.012 - 0.022	0.033 - 0.047	0.047	0.033 - 0.1
8	0.027 - 0.047	0.068 - 0.1	0.068 - 0.1	
10	0.056 - 0.1			

50WVDC


Diameter d \varnothing \pm 1m/m	Temperature Characteristic		
	Y5R	Y5T	Y5U
5	0.001 - 0.0056		0.01 - 0.022
6	0.0068 - 0.015	0.01 - 0.022	0.033 - 0.047
8	0.018 - 0.022	0.033 - 0.047	0.056 - 0.1
10	0.027 - 0.047	0.056 - 0.1	

REEL PACK

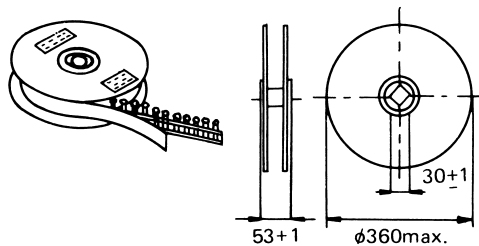

2000 – or 2500 pcs. per reel depending upon dia. of capacitor

AMMO PACK



2000 – 3000 pcs. per box.