

FEATURES

- Extremely low ESR
- 10 year service life
- RoHS/REACH compliant
- Halogen Free
- UL recognized

APPLICATIONS

- Peak power handling
- Industrial automation
- UPS/voltage hold up




GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C
Storage temperature	-40°C to +70°C
Capacitance range	650F to 3,000F
Rated voltage	2.7 VDC
Surge voltage	2.85 VDC
Temperature characteristics	Capacitance change: Within ±5% of initial measured value at +25°C (-40°C to +65°C) Internal resistance: Within ±50% of initial measured value at +25°C (at -40°C)
Endurance (At rated voltage & max. operating temp)	After 1500 hours: Capacitance change: Within ±20% of initial rated value Internal resistance: Within 2 times of initial specified value
Projected Load life (At rated voltage & 25°C)	10 years: Capacitance change: Within ±20% of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	1,000,000 cycles between Vr and ½ Vr: Capacitance change: Within ±20% of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 4 years at 25°C without load, the capacitor shall meet the specified endurance limits.

WARNING! This document contains confidential proprietary information of Tecate Group. Not to be copied or disclosed except by written permission from Tecate Group.

7520 Mission Valley Road • San Diego, CA 92108-4400 USA • Tel: 619.398.9700 • Fax: 619.398.9777 • www.tecategroup.com

DIMENSIONS

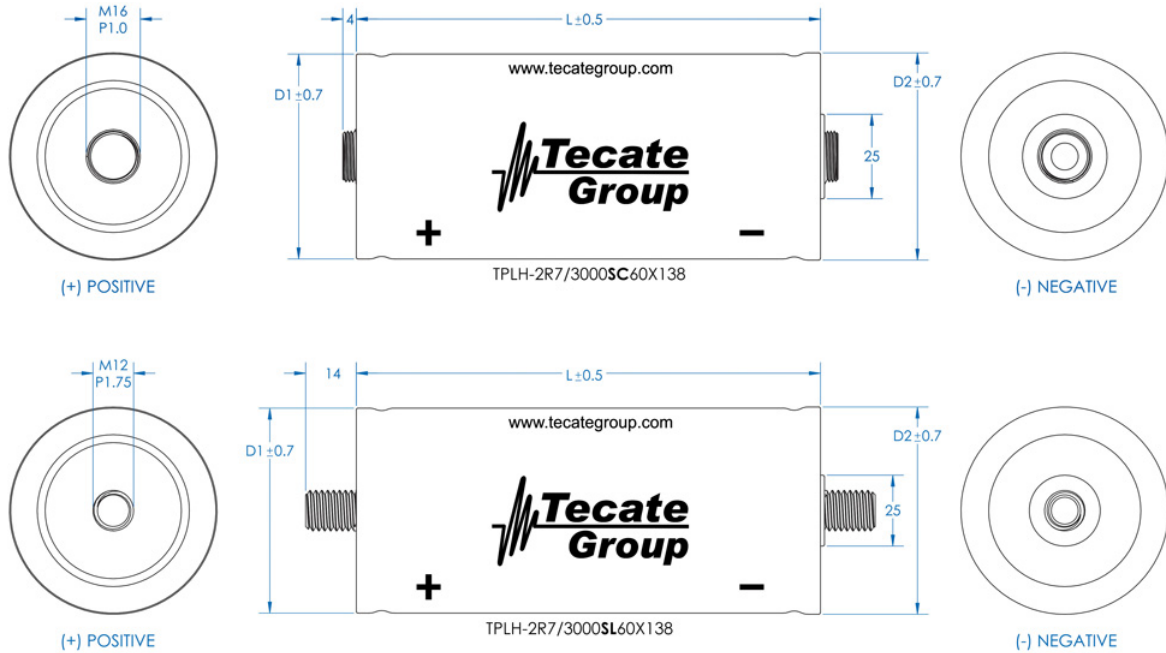

STANDARD PRODUCTS

Part Number	Nom. Cap. (F)	GMV (F)*	ESR DC (mΩ)	ESR AC (mΩ)	Leakage Current (mA) (72 hrs @ 25C)	Dimensions (mm)			Max Peak Current (A)	Weight/Unit (grams)
						D1	D2	L		
TPLH-2R7/650SC60X51	650	650	0.6	0.35	1.5	60	60.7	51.5	590	205
TPLH-2R7/650SL60X51	650	650	0.6	0.35	1.5	60	60.7	51.5	590	210
TPLH-2R7/1200SC60X74	1200	1200	0.36	0.25	2.7	60	60.7	74	1060	285
TPLH-2R7/1200SL60X74	1200	1200	0.36	0.25	2.7	60	60.7	74	1060	295
TPLH-2R7/1500SC60X85	1500	1500	0.31	0.27	3	60	60.7	85	1300	325
TPLH-2R7/1500SL60X85	1500	1500	0.31	0.27	3	60	60.7	85	1300	330
TPLH-2R7/2000SC60X102	2000	2000	0.3	0.21	4	60	60.7	102	1500	385
TPLH-2R7/2000SL60X102	2000	2000	0.3	0.21	4	60	60.7	102	1500	390
TPLH-2R7/3000SC60X138	3000	3000	0.26	0.17	5	60	60.7	138	2200	520
TPLH-2R7/3000SL60X138	3000	3000	0.26	0.17	5	60	60.7	138	2200	525

*NOTE: GMV = Guaranteed Minimum Value.

WARNING! This document contains confidential proprietary information of Tecate Group. Not to be copied or disclosed except by written permission from Tecate Group.

7520 Mission Valley Road • San Diego, CA 92108-4400 USA • Tel: 619.398.9700 • Fax: 619.398.9777 • www.tecategroup.com

Tecate reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Tecate also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Spec. Date: 2019-02-06 09:07:21