


STANDARD PRODUCT TABLE

100WVDC											
Type		Standard Size (92)					Low Profile (92M)				
Capacitance		W	H	T	P	ØD	W	H	T	P	ØD
Code	(µF)										
102	0.001	5.0	10.0	2.5	3.5	0.5	5.0	7.0	2.5	3.5	0.5
122	0.0012	5.0	10.0	2.5	3.5	0.5	5.0	7.0	2.5	3.5	0.5
152	0.0015	5.0	10.0	2.5	3.5	0.5	5.5	7.2	2.5	4.0	0.5
182	0.0018	5.0	10.0	2.5	3.5	0.5	5.5	7.2	2.5	4.0	0.5
222	0.0022	5.0	10.0	2.5	3.5	0.5	5.5	7.2	3.0	4.0	0.5
272	0.0027	5.5	10.5	3.0	3.5	0.5	5.5	7.2	3.0	4.0	0.5
332	0.0033	5.5	10.5	3.0	3.5	0.5	5.5	7.2	3.0	4.0	0.5
392	0.0039	5.5	10.5	3.0	3.5	0.5	5.5	7.2	3.0	4.0	0.5
472	0.0047	5.5	10.5	3.0	4.0	0.5	6.0	7.5	3.0	4.3	0.5
562	0.0056	5.5	10.5	3.0	4.0	0.5	6.0	7.5	3.5	4.3	0.5
682	0.0068	5.5	10.5	3.0	4.0	0.5	6.0	7.5	3.5	4.3	0.5
822	0.0082	6.0	10.5	3.5	4.0	0.5	6.0	7.5	3.5	4.3	0.5
103	0.01	6.0	10.5	3.5	4.0	0.5	5.5	8.0	3.0	4.0	0.5
123	0.012	6.5	11.0	3.0	4.5	0.5	5.5	8.0	3.0	4.0	0.5
153	0.015	6.5	11.0	3.0	4.5	0.5	6.0	8.0	3.0	4.0	0.5
183	0.018	6.5	11.0	3.0	4.5	0.5	6.0	8.5	3.0	4.3	0.5
223	0.022	7.0	11.5	3.5	5.3	0.5	6.5	8.5	3.0	5.0	0.5
273	0.027	7.0	11.5	3.5	5.36	0.5	6.5	8.5	3.0	5.0	0.5
333	0.033	7.5	12.0	3.5	5.5	0.5	7.0	9.0	3.5	5.3	0.5
393	0.039	7.5	12.0	4.0	5.5	0.5	7.5	9.5	3.5	5.5	0.5
473	0.047	8.0	12.0	4.0	5.7	0.5	7.5	9.5	3.5	5.5	0.5
563	0.056	9.0	12.0	4.0	6.5	0.5	7.5	9.5	3.5	5.5	0.5
683	0.068	9.0	12.0	4.0	6.5	0.5	8.0	10.0	4.0	5.7	0.5
823	0.082	9.5	12.0	5.0	7.5	0.5	9.0	10.0	5.0	6.3	0.5
104	0.10	10.0	12.5	5.5	7.5	0.5	9.0	10.5	5.0	6.5	0.5
124	0.12	11.0	13.0	6.0	9.5	0.5	9.5	10.5	5.5	6.5	0.5
154	0.15	12.0	15.0	6.0	9.5	0.5	10.0	12.5	5.5	6.5	0.5
184	0.18	12	15.0	6.0	9.5	0.5	10.0	12.5	5.5	6.5	0.5
224	0.22	13.5	15.0	7.0	9.5	0.6	11.0	12.5	6.5	7.3	0.5
274	0.27	13.5	15.0	7.0	9.5	0.6	11.0	12.5	6.5	7.3	0.5
334	0.33	14.0	17.5	7.0	10.0	0.6	12.5	14.5	7.5	8.5	0.6
394	0.39	14.5	17.5	7.5	10.0	0.6	12.5	14.5	7.5	8.5	0.6
474	0.47	16.0	19.5	10.0	10.0	0.6	14.0	14.5	8.5	9.0	0.6

TAPING

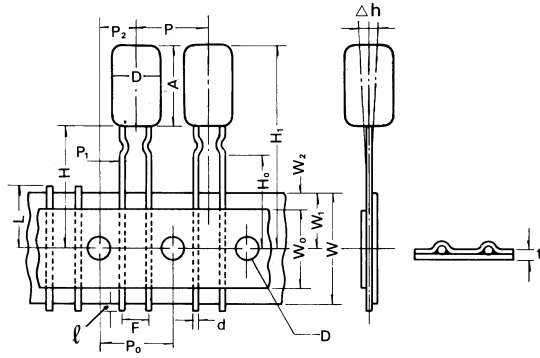

(Unit: mm)

REEL

Reel : 330 x 330 x 50 (Max.)  
Carton: 340 x 340 x 55 (Max.)

Cap (μF)	PCS
0.001~0.018	2.000
0.02 ~0.039	1.500
0.047~0.22	1.000

AMMO PACK

Ammo: 290 x 330 x 5.4 (Max.)

Cap (μF)	PCS
0.001~0.018	2.000
0.02 ~0.039	1.500
0.047~0.22	1.000

Symbol	Value	Tolerance	Remarks	Symbol	Value	Tolerance
b	0.5	± 0.05	0.6 ± 0.06	H	20.0	± 0.75
p	12.7	± 0.01		H <sub>0</sub>	16.0	± 0.5
P <sub>0</sub>	12.7	± 0.3			1.0	Maximum
P <sub>1</sub>	3.85	± 0.5		D <sub>0</sub>	4.0	± 0.3
P <sub>2</sub>	6.35	± 1.5		t	0.7	± 0.2
F	5.0	+ 0.8,-0.2		L	11.0	Maximum
Δh	0	± 1.0				
W	18.0	+ 1.0,-0.5	12.5			
W <sub>0</sub>	12.5	Minimum				
W <sub>1</sub>	9.0	± 0.5				
W <sub>2</sub>	3.0	Maximum				