


#### SPECIFICATIONS

- SEGMENTED METALLIZED POLYPROPYLENE FILM (MET OPP)
- ENCAPSULATED IN PLASTIC BOX WITH EPOXY FILL  
FLAME RETARDANT TO UL 94V-0
- OPERATING TEMPERATURE RANGE : -40+85°C
- VOLTAGE RANGE: 250VAC
- CAPACITANCE TOLERANCE : ±10% (K)
- DISSIPATION FACTOR (DF) : 0.1% MAX @ 25°C & 1KHz
- INSULATION RESISTANCE:  $\geq 1 \times 10^5 \text{ M}\Omega \times \text{MFD}$
- DIELECTRIC STRENGTH : T~T = 2 X RV FOR 2 SECONDS  
T~CASE 1500VDC FOR 1 MINUTE
- PARTS HAVE UL 810 10,000 AFC RECOGNITION (UL FILE NO: E154288)



#### VALUES

μF	250VAC			
	L	W	H	CASE
1.0	32.0	10.0	21.0	D, G, B, C6, A5 OR A6*
	32.0	12.5	21.5	L, H5 OR H6*
1.5	32.0	10.0	21.0	D, G, B, C6, A5 OR A6*
	32.0	12.5	21.5	L, H5 OR H6*
2.2	32.0	10.0	21.0	D, G, B, C6, A5 OR A6*
	32.0	12.5	21.5	L, H5 OR H6*
3.3	32.0	12.5	23.0	D, G, B, C6, A5 OR A6*
	32.0	12.5	21.5	L, H5 OR H6*
4.7	37.0	15.0	24.0	ALL TYPES
6.8	37.0	15.0	29.0	ALL TYPES
8.2	37.0	17.0	29.0	ALL TYPES
10	37.0	19.0	29.0	D, G, B, C6, A5 OR A6*
	37.0	20.0	29.0	L, H5 OR H6*
12	50.0	19.0	29.0	ALL TYPES
15	49.0	20.0	30.0	D, G, B, C6, A5 OR A6*
	50.0	20.0	30.0	L, H5 OR H6*

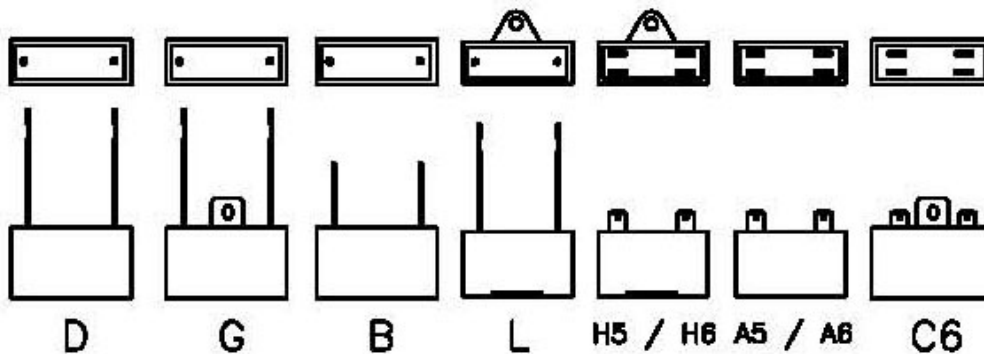

#### PART NUMBERING

Part Number Example: 9024A6-250/106KF								
9024	A	6	-	250	/	106	K F	
TYPE	CASE	QUICK CONNECT LUGS IF APPLICABLE		VAC		CAPACITANCE CODE (pF)	CAPACITANCE TOLERANCE (±10%)	RoHs COMPLIANT
** H5, H6, C6, A5 & A6 ARE H, C AND A CASES WITH DUAL QUICK CONNECT TERMINALS, 5=.25" & 6= >.187" WIDE TERMINAL BLADES								