

FEATURES

- Actively balanced
- Platinum resistance temperature detector
- Over voltage alarm monitoring
- 4.3kV isolation (terminal to case)
- IEC 61373
- IP65 Rated



APPLICATIONS

- Peak power handling
- Bridge power
- Industrial
- Telecommunication
- Military
- Mobility

Need a custom fit for your design? [Click here to get started.](#)


GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C
Storage temperature	-40°C to +70°C
Capacitance	166F
Rated voltage	54 VDC
Temperature characteristics	Capacitance change: No less than 5% of initial measured value at +25°C (at -40°C) Internal resistance: No more than 50% of initial measured value at +25°C (at -40°C)
Endurance (At rated voltage & max. operating temp)	After 1500 hours, the capacitor shall meet the following limits: Capacitance change: No less than 20% of initial rated value Internal resistance: No more than 100% of initial rated value
Projected Load life (At rated voltage & 25°C)	After 10 years: Capacitance change: No less than 20% of initial rated value Internal resistance: No more than 100% of initial rated value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 1,000,000 cycles: Capacitance change: No less than 20% of initial rated value Internal resistance: No more than 100% of initial rated value
Shelf life	After 4 years at 25°C without load, the capacitor shall meet the specified endurance limits.

WARNING! This document contains confidential proprietary information of Tecate Group. Not to be copied or disclosed except by written permission from Tecate Group.

7460 Mission Valley Rd. Suite 100 • San Diego, CA 92108-4438 USA • Tel: 619.398.9700 • www.tecategroup.com

DIMENSIONS

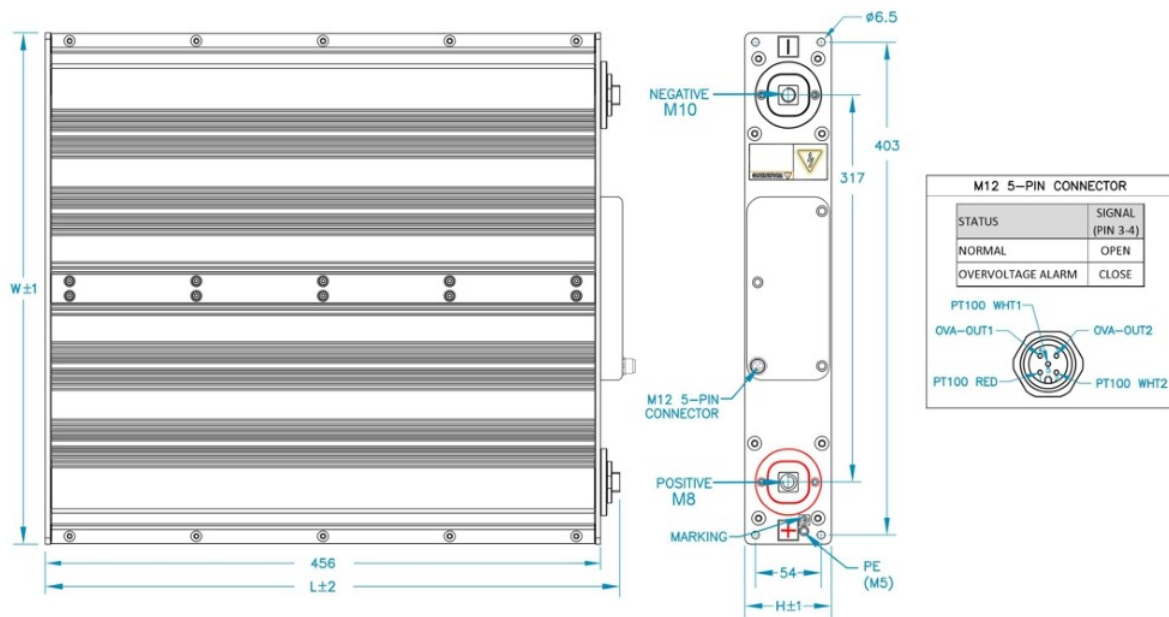

STANDARD PRODUCTS

Part Number	Nom. Cap. (F)	ESR DC (mΩ)	Leakage Current (mA) (72 hrs @ 25C)	Dimensions (mm)			Max Current (A)	Weight/Unit (Kg)
				L	W	H		
PBLH-54R0/166SDHV	166	3.5	5	487.2	418	71	2500	18

WARNING! This document contains confidential proprietary information of Tecate Group. Not to be copied or disclosed except by written permission from Tecate Group.

7460 Mission Valley Rd. Suite 100 • San Diego, CA 92108-4438 USA • Tel: 619.398.9700 • www.tecategroup.com

Tecate reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Tecate also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Spec. Date: 2026-07-28 19:18:30