

FEATURES

- Small size and low resistance
- Passive linear voltage balanced cells
- Quick charge and discharge
- JST ZHR-2 quick connect
- RoHS compliant
- UL recognized



APPLICATIONS

- Pulse power demand
- Hybrid battery packs
- Portable electronic devices

Need a custom fit for your design? [Click here to get started.](#)

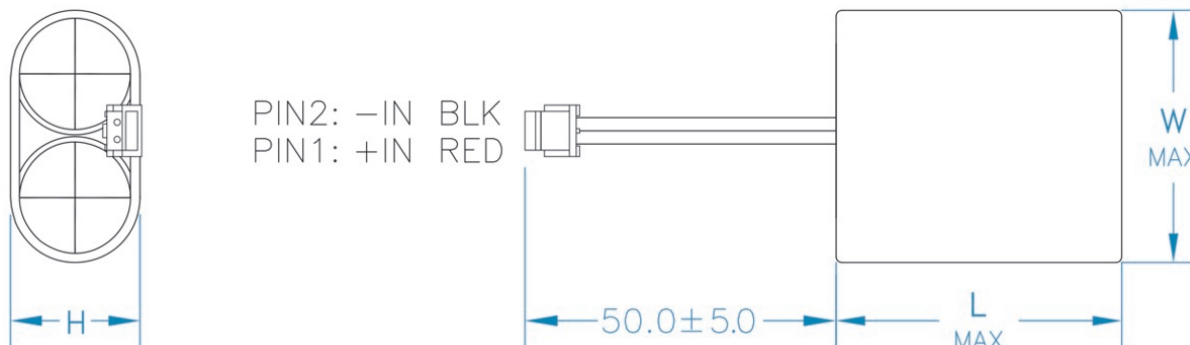


GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C @ 5.4V -40°C to +85°C @ 4.6V
Storage temperature	-40°C to +70°C
Capacitance	0.47F
Rated voltage	5.4 VDC / 4.6 VDC
Surge voltage	5.7 VDC
Temperature characteristics	Capacitance change: Within $\pm 5\%$ of initial measured value at +25°C (-40°C to +65°C) Internal resistance: Within $\pm 50\%$ of initial measured value at +25°C (at -40°C)
Endurance (At rated voltage & max. operating temp)	After 1000 hours: Capacitance change: within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected Load life (At rated voltage & 25°C)	After 10 years: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 4 years at 25°C without load, the capacitor shall meet the specified endurance limits.

DIMENSIONS

Units = mm


STANDARD PRODUCTS

Part Number	Nom. Cap. (F)	GMV (F)*	ESR DC (m Ω)	ESR AC (m Ω) (1 KHz)	Leakage Current (μ A) (72 hrs @ 25C)	Dimensions (mm)			Rated Current (A)
						L	W	H	
PBLL-0.47/5.4	0.47	0.42	1460	690	80	17	18	10	0.78

*NOTE: GMV = Guaranteed Minimum Value.