

### FEATURES

- Compact size and energy dense
- Higher voltage
- Quick charge and discharge
- RoHS & Reach compliant

### APPLICATIONS

- Pulse power demand
- Ride thru power support
- Back up power
- Stand alone or augment existing energy/power source




**Need a custom fit for your design? [Click here to get started.](#)**

### GENERAL SPECIFICATIONS

| Item                                                  | Performance                                                                                                                                                            |
|-------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating temperature                                 | -15°C to +70°C @ 3.8V<br>-15°C to +85°C @ 3.5V                                                                                                                         |
| Storage temperature                                   | -25°C to +70°C                                                                                                                                                         |
| Capacitance                                           | 450F                                                                                                                                                                   |
| Capacitance tolerance                                 | +/-20%                                                                                                                                                                 |
| Rated voltage                                         | 3.8 VDC / 3.5 VDC                                                                                                                                                      |
| Minimum rated voltage                                 | 2.2 VDC                                                                                                                                                                |
| Surge voltage                                         | 4.2 VDC                                                                                                                                                                |
| Temperature characteristics                           | Capacitance change: Within ±50% of initial measured value at +25°C (-15°C to +70°C)<br>Internal resistance: Within ±600% of initial measured value at +25°C (at -15°C) |
| Endurance<br>(At rated voltage & max. operating temp) | After 1000 hours:<br>Capacitance change: ±30% of minimum rated value<br>Internal resistance: Within 2 times of maximum rated value                                     |
| Projected cycle life                                  | After 500,000 cycles: From 3.8V to 2.5V at 25°C<br>Capacitance change: Within ±30 % of minimum value<br>Internal resistance: Within 2 times of maximum rated value     |
| Shelf life                                            | Three years at 25°C, or 1000hours at 70°C without load. The Capacitor shall meet the specified endurance limits.                                                       |

## DIMENSIONS

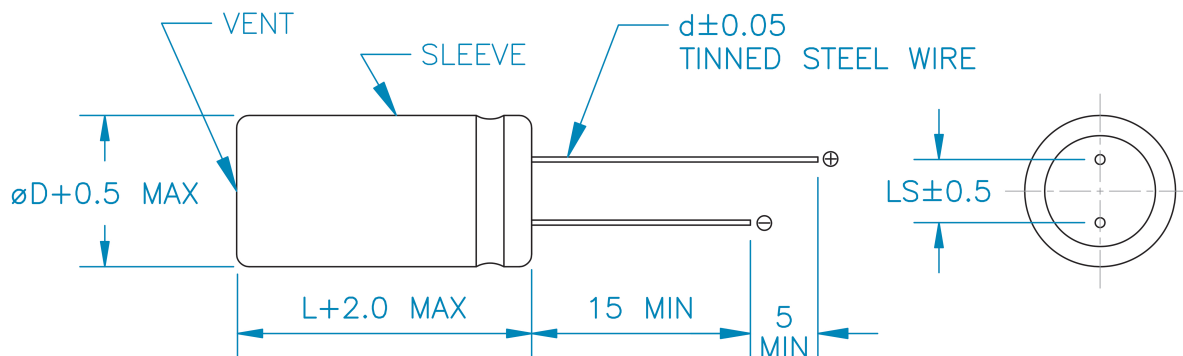

## STANDARD PRODUCTS

| Part Number         | UL                                                                                  | Nom. Cap. (F) | ESR AC (m $\Omega$ ) (1 KHz) | ESR DC Typical (m $\Omega$ ) | Leakage Current ( $\mu$ A) | Dimensions (mm) |    |     |     | Rated Current (A) | Max Current* (A) | Weight/Unit (grams) |
|---------------------|-------------------------------------------------------------------------------------|---------------|------------------------------|------------------------------|----------------------------|-----------------|----|-----|-----|-------------------|------------------|---------------------|
|                     |                                                                                     |               |                              |                              |                            | D               | L  | d   | LS  |                   |                  |                     |
| TPLC-3R8/450MR18X40 |  | 450           | 60                           | 120                          | 35                         | 18              | 40 | 0.8 | 7.5 | 2.75              | 20               | 18                  |

\* Maximum allowable current for 3 seconds or less.