


## FEATURES

- Small size and low resistance
- Quick charge and discharge
- RoHS compliant
- UL recognized



## APPLICATIONS

- Pulse power demand
- Hybrid battery packs
- Portable electronic devices

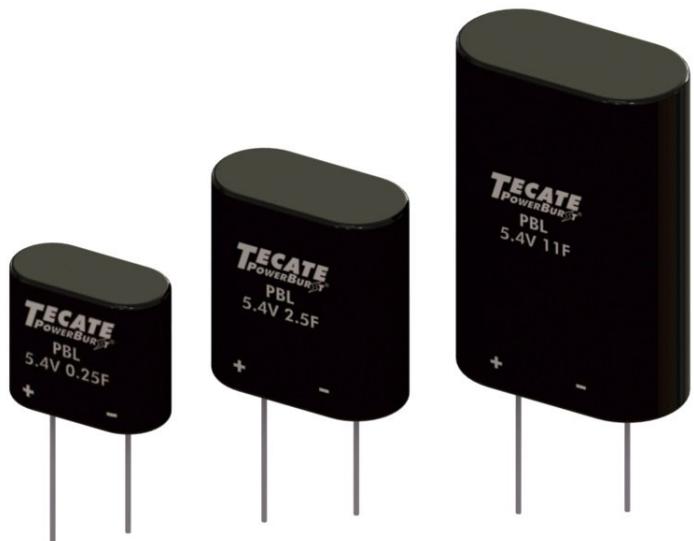


**Need a custom fit for your design? [Click here to get started.](#)**

## GENERAL SPECIFICATIONS

Item	Performance
Operating temperature	-40°C to +65°C @ 5.4V -40°C to +85°C @ 4.6V
Storage temperature	-40°C to +70°C
Capacitance	11F
Rated voltage	5.4 VDC / 4.6 VDC
Surge voltage	5.7 VDC
Temperature characteristics	Capacitance change: Within $\pm 5\%$ of initial measured value at +25°C (-40°C to +65°C) Internal resistance: Within $\pm 50\%$ of initial measured value at +25°C (at -40°C)
Endurance (At rated voltage & max. operating temp)	After 1000 hours, the capacitor shall meet the following limits: Capacitance change: $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected Load life (At rated voltage & 25°C)	After 10 years: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within $\pm 30\%$ of initial rated value Internal resistance: Within 2 times of initial specified value
Shelf life	After 4 years at 25°C without load, the capacitor shall meet the specified endurance limits.

## DIMENSIONS

Units = mm

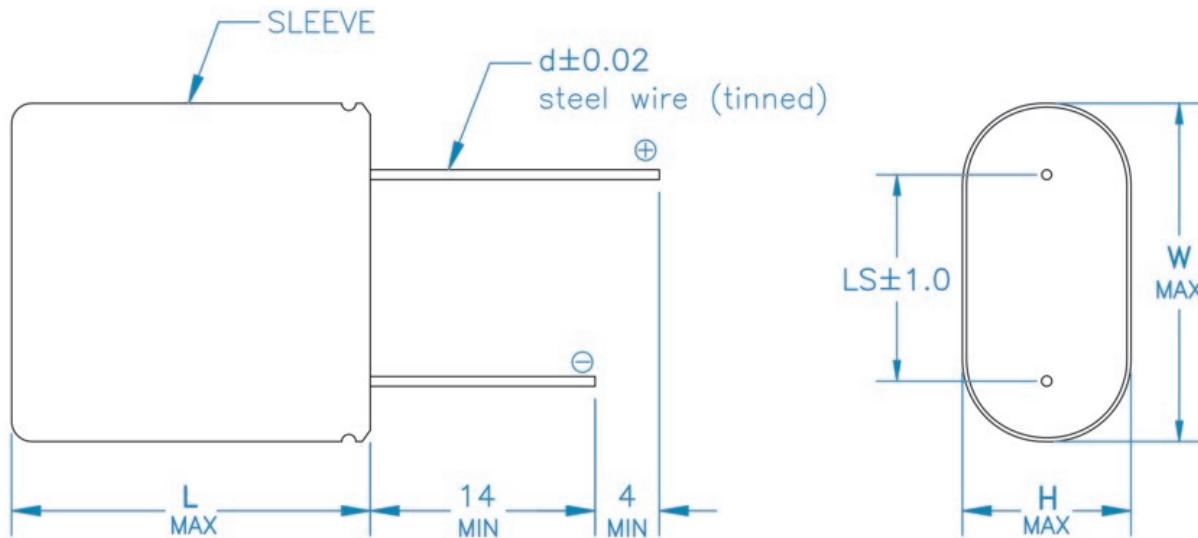

## STANDARD PRODUCTS

Part Number	Nom. Cap. (F)	GMV (F)*	ESR DC (mΩ)	ESR AC (mΩ) (1 KHz)	Leakage Current (µA) (72 hrs @ 25C)	Dimensions (mm)					Rated Current (A)
						L	W	H	d	LS	
PBL-11.0/5.4	11	9.9	90	60	580	40	27	14	0.8	18.2	14.92

\*NOTE: GMV = Guaranteed Minimum Value.